



Self-service Kiosk Retransfer Dual-sided Card Printer

R600M



Key Feature

Adopt high-resolution transfer dye-sublimation color printing technology.
 Standard 600dpi x 600dpi high resolution dual-sided printing
 Higher image quality and clear text, realizing professional-level printing effects
 Perfectly realize the entire card over-edge printing
 High printing speed engine
 All-metal movement and outer shell, more stable continuous printing ability of card
 Support PVC, composite PVC, ABS, PET, PC and other materials to print high-quality cards
 Standard bend correction module
 Professional self-service kiosk retransfer card printer solution

Multi-function optional module

Dual interface card encoding module
 UHF chip card encoding module
 Contactless ID card encoding module
 Magnetic stripe card encoding module
 Lamination module

Consumables

Monochrome black ribbon: 100x60mm
 Full panel YMCK ribbon: 500 prints/roll and 1000 prints/roll
 Full panel YMCKK ribbon: 500 prints/roll
 Full panel YMCKI ribbon: 500 prints/roll
 Full panel YMCKHs ribbon: 500 prints/roll
 Security YMCLUvK ribbon: 500 prints/roll
 Transparent retransfer film: 500 prints/roll and 1000 prints/roll


Value-added functions

Available to set card input & output on front/ back end
 Support output card holding, holding card length on front/ back end
 Available to select defective card slot, with function of automatically reclaim overtime card
 Available to set the direction of output card

SEAOBY R



Dye-sublimation transfer printing technology

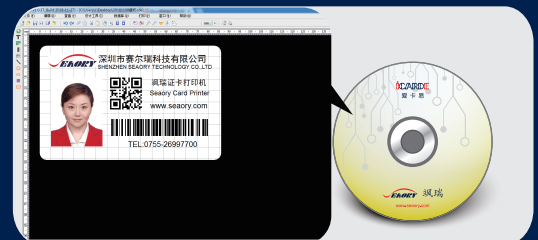

Specifications

*Reserve the right to change the parameters without prior notice

Product Name	R600M / Self-service Kiosk Retransfer Dual-sided Card Printer
Printer Dimension	367mm × 262mm × 313mm(Length x Width x Height),19Kg
Power	100-240VAC, 50/60Hz,4A
Print Speed	Monochrome black printing: 15-18s per card(single-sided), 30-34s per card(dual-sided) using ribbon saving technology Full-color YMCK Printing: 25s per card(single-sided), 42s per card(dual-sided)
Print Dimension	ISO CR80(53.98mm×85.60mm)over-edge printing of the entire card
Print Resolution	600dpi × 600dpi
Print Method	Dye sublimation retransfer printing
Memory	128MB
Interfaces	Standard USB2.0 & Ethernet, WIFI(optional)
Card Material	PVC, composite PVC, ABS, PET, PC and other materials
Card Thickness	0.3-1.05mm(hopper adjustment required)
Input hopper capacity	None
Output hopper capacity	None
Defective card slot capacity	25pcs(0.76mm), optional module
Buzzer	Yes
Indicator	Red and green two-color indicator
LCM Display	None
Software	Driver: Support 32-bit and 64-bit Windows® XP, 7, 8, 10, Windows® Server 2003/2008/2012/2016/2019, 32-bit and 64-bit Linux, Android Support Chinese operating systems, such as the NeoKylin, Kylin and UnionTech UOS. Card design software:ICARDE card design software Supports 32-bit and 64-bit Windows® XP, 7, 8, 10, Windows® Server 2003/2008/2012/2016/2019
Warranty	Card printer: 3 years(artificial damage excluded)Print head: lifetime warranty
Operation Environment	Regular running temp: 15°C-30°C(59-86°F), 20%-65% RH non-condensing Lowest/ Highest running temp: 0°C(32°F)/40°C(104°F), 20% to 65% RH non-condensing.
Storage Environment	Temp.: -5°C-70°C(23-158°F), 20% to 70% RH non-condensing and ventilation environment
Certificates	CCC, CE, FCC, RoHS, UKCA

