



Self-service Kiosk Card Printer

S22K

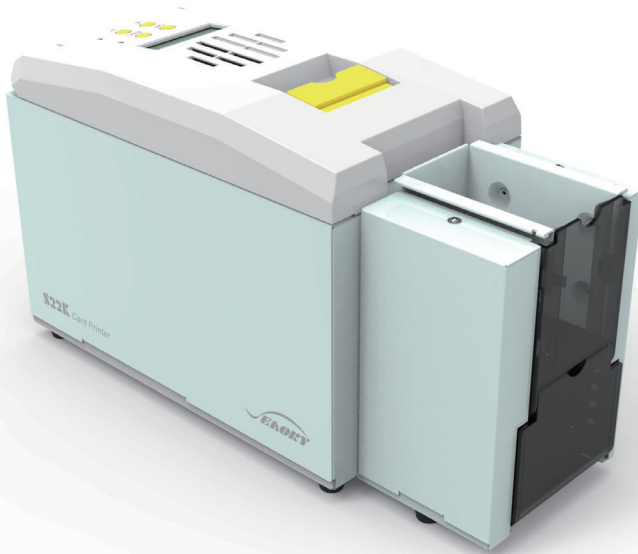

Front end

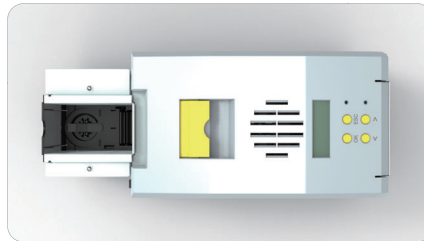

Top end



Back end

SEAORY S

Lightweight body, Reliability and Easy-to-Use Consumables

Advanced thermal dye-sublimation printing technology
 Continuous printing of cards and time-saving effort
 Simple operation interface and easy-to-use
 Lightweight and easy to maintain
 Low noise in printing process
 High Printing Speed Engine

Full panel YMCKO ribbon: 100 prints/roll, 300 prints/roll
 Full panel YMCKOK ribbon: 240 prints/roll
 1/2 panel ymckoko ribbon: 250 prints/roll
 1/2 panel ymckO ribbon: 450 prints/roll
 Monochrome black ribbon: 100mx60mm, 200mx60mm
 Monochrome ribbon(gold/silver/white/red/ blue): 100mx60mm
 KO ribbon: 500 prints/roll
 UV Ultraviolet Security Ribbon: 100m×60mm

Features


Self-service kiosk card printer
 Support dual-sided printing
 High Definition Color Printing
 Support hand-feeding
 Automatic card-feeding

Multi-functional option module to support various card printing

Dual interface card encoding module
 Contactless ID Card encoding module
 UHF chip card encoding module
 Magnetic stripe card encoding module



High quality photo processing by Dye sublimation technology

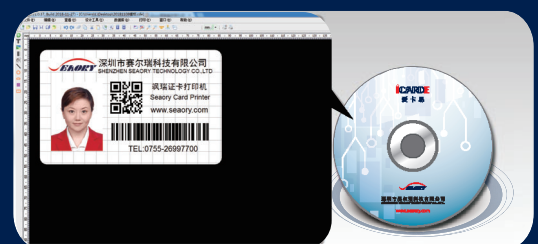

Come with professional printing software

Technical Parameter

Model	S22K / Self-service Kiosk Card Printer
Specifications	376 × 160 × 207 (mm), 6.8Kg(High capacity input hopper's height 420mm, Locking card input hopper's height 282mm)
Interfaces	USB & Ethernet & RS232
Input Capacity	100 cards(Standard 100 pcs/High capacity input hopper 400 pcs/ Locking card input hopper 200 pcs)
Output Capacity	--
Print Speed	Monochrome printing: 3~5 s per card(single-sided) / 7~12 s per card(dual-sided); Full-color(YMCKO) printing: 20 s per card(single-sided) / 42 s per card(dual-sided).
Card Material	PVC / Composite PVC / Other material upon request and validation
Power	AC 100~240V, 50/60 Hz, DC 24-25.5V, 2.7 A
Print Dimension	ISO CR80 (53.98mm×85.60mm), edge-to-edge printing
Print Resolution	300dpi × 300dpi (300 dpi × 600 dpi, 300 dpi × 1200 dpi print resolution optional)
Memory	128MB
Print Method	Dye sublimation (Direct-to-card)
Card Thickness	0.3-1.05mm
LCM Display	Chinese: 8 characters per line, 2 lines / English: 16 characters per line, 4 lines / Multi-language
Operation System	Driver: Support Windows XP/7/8/10/11, Windows Server 2003/2008/2012/2016, Linux, and NeoKylin, Kylin, UOS and other made-in-China operating system. Development Kit: Support Windows XP/7/8/10/11, Windows Server 2003/2008/2012/2016, Linux, and NeoKylin, Kylin, UOS and other made-in-China Operating System Card Design Software: iCARDE card design software, support Windows XP/7/8/10 operating systems
Warranty	Card printer : 24 months (artificial damage excluded) / Print head: Replace one for free within 1 year (artificial damage excluded)
Operating Condition	1. Regular running temp.: 15°C-30°C(59-86°F), 20%~65% RH non-condensing 2. Lowest / Highest running temp.: 0°C(32°F) / 40°C(104°F), 20%~65% RH non-condensing
Storage Condition	Temp.: -5°C-70°C(23-158°F), 20%~70% RH non-condensing
Certificates	CCC, FCC, CE, ROHS, BIS

